

## TABLE OF CONTENTS

	<b>PAGE</b>
ACKNOWLEDGEMENTS	iii
ABSTRACT (ENGLISH)	iv
ABSTRACT (THAI)	v
TABLE OF CONTENTS	vi
LIST OF TABLE	ix
LIST OF FIGURES	x
<b>CHAPTER 1 INTRODUCTION</b>	<b>1</b>
1.1 Vitamin C	1
1.2 Analytical methods	2
1.2.1 Titrimetric methods	2
1.2.2 Electroanalytical methods	3
1.2.3 Chemiluminescence methods	3
1.2.4 Fluorimetric methods	3
1.2.5 Chromatographic methods	4
1.2.6 Spectrophotometric methods	4
1.2.7 Miscellaneous methods	5
1.3 Stopped-flow technique	10

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
 Copyright © by Chiang Mai University  
 All rights reserved

1.4	Research aims	11
<b>CHAPTER 2 EXPERIMENTAL</b>		12
2.1	Materials and apparatus	12
2.2	Reagents	12
2.3	Preparation of standard solution and reagent	13
2.3.1	Stock standard solution of ascorbic acid 1000 ppm	13
2.3.2	Reagent solution, molybdic acid	13
2.3.3	Sulfuric acid, $0.55 \times 10^{-1}$ M	13
2.3.4	Metaphosphoric acid- acetic acid solution	13
2.3.5	Standard dye solution (2,6-dichlorophenol indophenol)	14
2.3.6	Preparation of fruit samples	14
2.4	Method and operation steps	14
2.4.1	Stopped-flow system for determination of vitamin C	14
2.4.2	Optimization	16
2.4.3	Titrimetric determination of vitamin C	16
<b>CHAPTER 3 RESULTS AND DISCUSSION</b>		17
3.1	Detection reaction of the stopped-flow system for determination of vitamin C in some fruits	17
3.2	Parameters study	18
3.2.1	Effect on the travelling time of reactance	18

3.2.2	Effect of reagent volume	21
3.2.3	Effect of reagent concentration	23
3.2.3.1	Effect of sodium molybdate concentration	23
3.2.3.2	Effect of potassium dihydrogen phosphate concentrations	26
3.2.3.3	Effect of sulfuric acid concentration	29
3.2.4	Re-study of travelling time	33
3.2.5	Effect of stopping time in stopping coil (MC2)	35
3.2.6	Summary of the operation time in each step	39
3.2.7	Summary of the selected conditions	40
3.3	Calibration graph	41
3.4	Precision	44
3.5	Interference study	45
3.6	Determination of vitamin C in some fruit samples	46

## CHAPTER 4 CONCLUSIONS

4.1	Conclusion	50
-----	------------	----

## REFERENCES


<b>APPENDICES</b>	56
Appendix A Reference Tartaric acid	57
Appendix B Determination of vitamin C in fruit samples	58
Appendix C Stopped-FIA gram	62
<b>CURRICULUM VITAE</b>	81
<b>THE RELEVANCE OF THE RESEARCH WORK TO THAILAND</b>	84

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF TABLES

<b>TABLE</b>		<b>PAGE</b>
1.1	Summarization of stopped-flow analytical methods for determinations of vitamin C	6
3.1	The preliminary parameters of the stopped-flow system	18
3.2	The effect of travelling time on peak height and peak	19
3.3	Peak heights and peak area obtained from variation switching time for reagent stream	22
3.4	The effect of sodium molybdate concentrations	24
3.5	Calibration graph data using varing sodium molybdate concentrations	25
3.6	Data of peak using different potassium dihydrogen phosphate concentrations	27
3.7	Calibration graph data using varing potassium dihydrogen phosphate concentrations	27
3.8	The effect of sulfuric acid concentrations	30
3.9	Calibration graph data using varing sulfuric acid concentrations	30
3.10	The effect of travelling time on peak height and peak	33
3.11	Data of peak using variation stopping time	36
3.12	Slope of calibration graph using varing variation stopped time	36
3.13	Operation time of the stopped flow system for vitamin C determination	39

3.14	Conditions used for the determination of vitamin C in some fruits	40
3.15	Calibration graph data of 10-100 mg/L ascorbic acid	41
3.16	Precision of ascorbic acid determination by stopped-flow method	44
3.17	Effect of tartrate determination by stopped-flow method	45
3.18	The amount of vitamin C in fresh fruit juice obtained from the stopped-flow system and titrimetric method	47

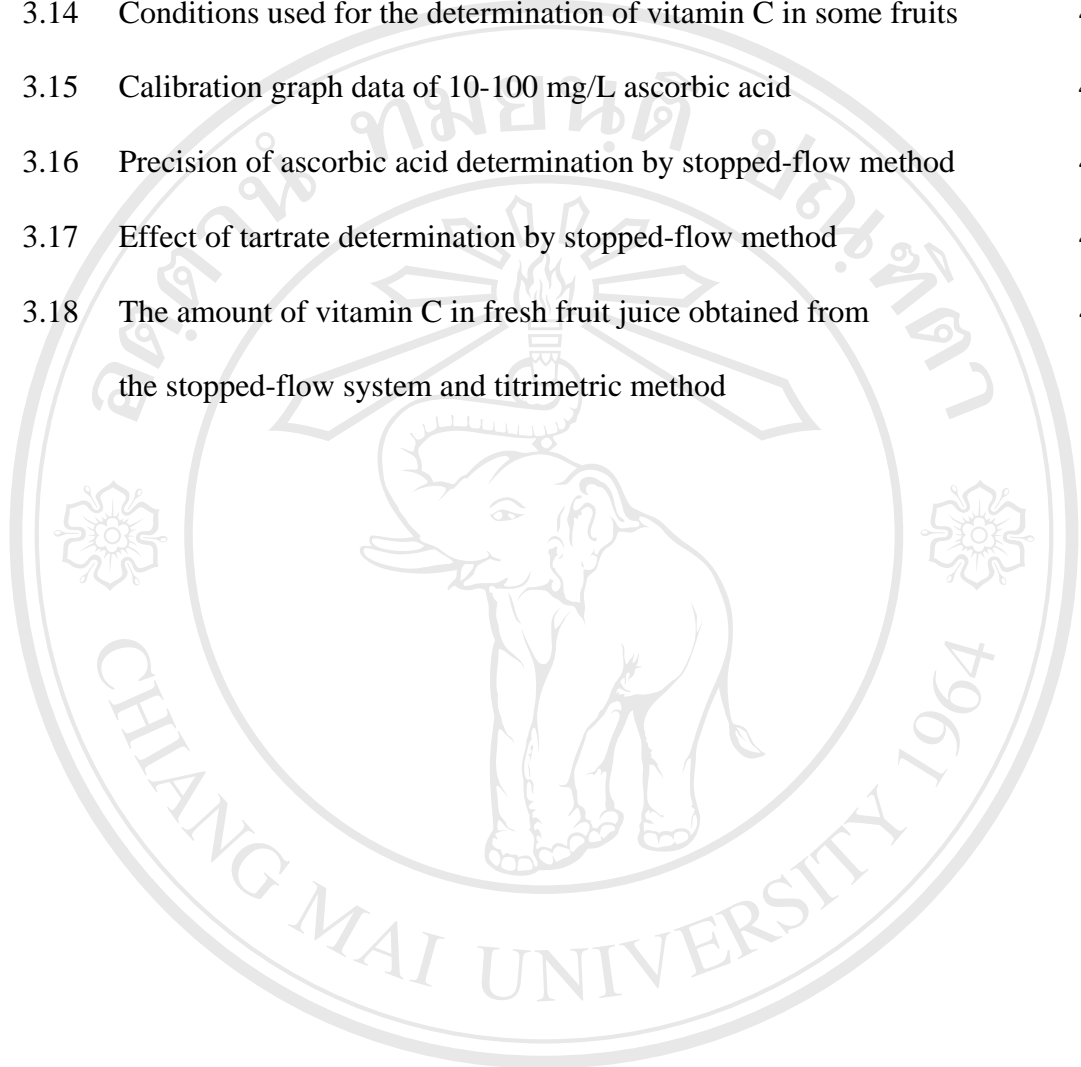

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF FIGURES

FIGURE	PAGE
1.1 The structure of vitamin C (L-ascorbic acid)	1
1.2 General stopped-FI gram: T = Travelling time, S = Stopping time, W = Washing time	8
2.1 Stopped-FIA manifold for determination of vitamin C: P = peristaltic pump; V2 and V3 = six-port valves; V1 and V4 = Three-way valve; MC1 and MC2 = Premixing coil and stopping coil (30 and 200 cm); D = detector (Spectronic 21)	15
3.1 Effect of traveling time on peak height	20
3.2 Effect of traveling time on peak area	20
3.3 Stopped-FIA-gram of various volume of reagent stream obtained from the system	21
3.4 Effect of switching time of reagent stream on peak height	22
3.5 Effect of switching time of reagent stream on peak area	23
3.6 Effect of sodium molybdate concentrations on peak height	25
3.7 Effect of sodium molybdate concentrations on peak area	26
3.8 Effect of potassium dihydrogen phosphate concentrations on peak height	28

3.9	Effect of potassium dihydrogen phosphate concentrations on peak area	28
3.10	Effect of sulfuric acid concentration on peak height	31
3.11	Effect of sulfuric acid concentration on peak area	31
3.12	FIA gram of various travel times	32
3.13	Effect of traveling time on peak height	34
3.14	Effect of traveling time on peak area	34
3.15	Effect of switching time on peak height	37
3.16	Effect of switching time on peak area	37
3.17	FIA-gram of various ascorbic acid standard concentrations obtained from the stopped-flow system	40
3.18	A Calibration graph of peak height for vitamin C determination obtained from the stopped-flow system	40
3.19	A Calibration graph of peak area for vitamin C determination obtained from the stopped-flow system	41
3.20	Correlation graph of the amount of vitamin C found in fruit samples by stopped-flow system and titrimetric method	46