

# CONTENTS


	<b>Page</b>
Acknowledgement	c
Abstract in Thai	d
Abstract in English	d
List of Tables	k
List of Figures	l
<b>Chapter 1</b>	<b>1</b>
1.1 Problem Statement	1
1.2 Research question	6
1.3 Objectives	7
1.4 Scope of study	7
1.5 Output expectation	7
1.6 Thesis outline	8
<b>Chapter 2 Theories and Literature Review</b>	<b>9</b>
2.1 Phnom Penh Row houses and regulations	9
2.2 Phnom Penh weather data	12
2.3 Comfort factors and standard of comfort zone	13
2.3.1 Operative temperature	14
2.3.2 Air velocity	15
2.3.3 Relative humidity	16
2.4 Passive stack effect ventilation strategies for dwelling	17
2.4.1 Principle of air movement	17
2.4.2 Stack effect ventilation strategies	18
2.4.3 Theories of heat transfer in Trombe wall	21
2.5 Previous studies	31
2.5.1 Types and materials of Trombe wall	31
2.5.2 Advantages of Trombe wall	33

## CONTENTS (Continued)

	<b>Page</b>
2.5.3 The Study of Trombe wall ratio	33
2.6 XFlow Computational Fluid Dynamics	36
<b>Chapter 3 Methodology</b>	<b>39</b>
3.1 Description of methodology	39
3.2 Modeling set up and boundary conditions	41
3.2.1 Modeling set up	41
3.2.2 Model boundaries condition	43
3.3 Post processing analysis	45
<b>Chapter 4 Results and Discussion</b>	<b>47</b>
4.1 Simulation result on top of stair block chamber	47
4.1.1 Temperature simulation output	47
4.1.2 Velocity simulation output	51
4.1.3 Mass flow simulation output	57
4.2 Simulation result for whole house experiment	58
4.2.1 Temperature at specific place of house	58
4.2.2 Velocity at specific place in row house	64
4.2.3 Simulation results of air mass flow rate	71
4.3 Discussion	71
4.3.1 Comparison of velocity at Trombe wall outlets for the two groups	71
4.3.2 Capacity of Trombe wall	73
4.3.3 Chances for new experiments	73
<b>Chapter 5 Conclusion and Suggestion</b>	<b>77</b>
5.1 Conclusion	77
5.2 Limitation	79

## CONTENTS (Continued)


	<b>Page</b>
5.3 Recommendation for future research	79
References	81
Appendix	86
Appendix A	87
Appendix B	90
Curriculum Vitae	98

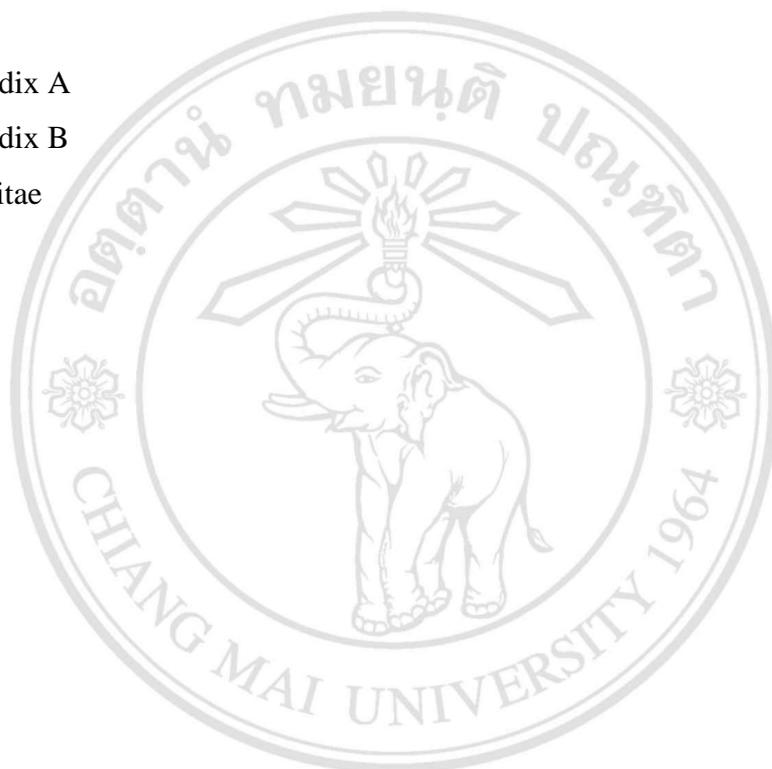

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF TABLES

	<b>Page</b>
Table 3.1 temperature on internal surface of glass and wall	44
Table 3.2 input parameter for simulation	45
Table 4.1 average mass flow at steady state of each heat flux.	58
Table 4.2 average of temperature at living room, kitchen, and outlet (in k)	59
Table 4.3 average of air velocity in living room, kitchen and outlet (in m/s)	64

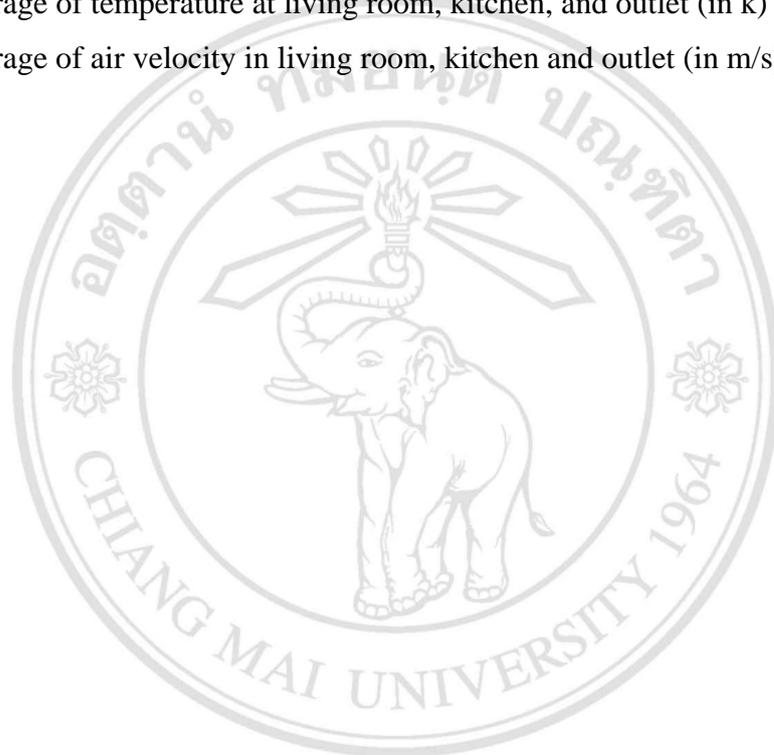

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF FIGURES

	<b>Page</b>
Figure 1.1 houses type classification in phnom penh 2008	1
Figure 1.2 phnom penh map borey row house block area	3
Figure 1.3 comparison of indoor and outdoor wind speed from a base case measurement of row house	4
Figure 1.4 comparison of indoor and outdoor temperature from a base case measurement of row house	5
Figure 1.5 comparison of indoor and outdoor humidity from a base case measurement of row house	5
Figure 2.1 picture of phnom penh row house for the study case	10
Figure 2.2 daily high/low temperature for phnom penh. The daily average low (blue) and high (red) [8]	13
Figure 2.3 ashrae summer psychrometric chart for human comfort [10]	14
Figure 2.4 bioclimatic comfort chart by olgyay, vector 1961 [14]	17
Figure 2.5 the process of heat transfer.	23
Figure 2.6 shows a fluid element's state of stress in terms of the pressure and nine viscous stress components.	24
Figure 2.7 fluid element's state of stress in terms of the pressure and nine viscous stress components [24]	28
Figure 3.1 diagram of research methodology study	34
Figure 3.2 3d modeling of the study case showing the location of trombe wall, in (m)	42
Figure 3.3 3d modeling of the study case showing the existing house with its outlet, in (m)	42
Figure 3.4 trombe wall dimension in (cm)	43
Figure 4.1 Average temperature in channel by all heat flux	48
Figure 4.2 Comparison of temperature pattern in channel from wall to glass, at 5s	49

## LIST OF FIGURES (Continued)

	<b>Page</b>
Figure 4.3 Comparison of temperature pattern in channel from wall to glass, at 20s	49
Figure 4.4 Comparison of temperature pattern in channel from wall to glass, at 200s	49
Figure 4.5 3D view temperature by heat flux 1000W/m <sup>2</sup> , at time 5s	50
Figure 4.6 (left) 3D view temperature by heat flux 1000W/m <sup>2</sup> , at time 20s	50
Figure 4.7 (left) 3D view temperature by heat flux 1000W/m <sup>2</sup> , at time 200s	50
Figure 4.8 temperature pattern in channel by heat flux 1000W/m <sup>2</sup> , at time 5s	51
Figure 4.9 (left) temperature pattern in channel by heat flux 1000W/m <sup>2</sup> , at time 20s	51
Figure 4.10 (right) temperature pattern in channel by heat flux 1000W/m <sup>2</sup> , at time 200s	51
Figure 4.11 average of velocity in channel by all heat flux at step of times	52
Figure 4.12 Comparison of velocity pattern in channel from wall to glass at 5s	53
Figure 4.13 Comparison of velocity pattern in channel from wall to glass at 20s	53
Figure 4.14 Comparison of velocity pattern in channel from wall to glass at 200s	54
Figure 4.15 3D view and flow vector of velocity by heat flux 1000W/m <sup>2</sup> , at time 5s	55
Figure 4.16 3D view and flow vector of velocity by heat flux 1000W/m <sup>2</sup> , at time 20s	55
Figure 4.17 3D view and flow vector of velocity by heat flux 1000W/m <sup>2</sup> , at time 200s	56
Figure 4.18 Velocity flow pattern in channel by heat flux 1000W/m <sup>2</sup> , at 5s	56
Figure 4.19 (left) Velocity flow pattern in channel by heat flux 1000W/m <sup>2</sup> , at 20s	57
Figure 4.20 (right) Velocity flow pattern in channel by heat flux 1000W/m <sup>2</sup> , at 200s	57
Figure 4.21 Mass flow at inlet of channel along steps to time	57
Figure 4.22 NTW case, temperature pattern at 60s	60

## LIST OF FIGURES (Continued)

	<b>Page</b>
Figure 4.23 HC-NTW case, temperature pattern at 60s	60
Figure 4.24 TW 200W/m <sup>2</sup> case, temperature pattern at 60s	61
Figure 4.25 TW 1000W/m <sup>2</sup> case, temperature pattern at 60s	61
Figure 4.26 HC-TW1000W/m <sup>2</sup> case, temperature pattern at 60s	62
Figure 4.27 HC-TW1000W/m <sup>2</sup> case at horizontal cutting, temperature pattern at 60s	62
Figure 4.28 (left) Temperature pattern at living room, at time 5s	63
Figure 4.29 (right) Temperature pattern at living room, at time 20s	63
Figure 4.30 (left) Temperature pattern at living room, at time 40s	63
Figure 4.31 (right) Temperature pattern at living room, at time 60s	63
Figure 4.32 Temperature pattern at kitchen, at time 60s	64
Figure 4.33 NTW case, velocity flow pattern at 60s	66
Figure 4.34 HC-NTW case, velocity flow pattern at 60s	66
Figure 4.35 TW 200W/m <sup>2</sup> case, velocity flow pattern at 60s	66
Figure 4.36 TW 1000W/m <sup>2</sup> case, velocity flow pattern at 60s	67
Figure 4.37 HC-TW1000W/m <sup>2</sup> case, velocity flow pattern at 60s	67
Figure 4.38 HC-TW1000W/m <sup>2</sup> case at horizontal cutting plan, velocity flow pattern at 60s	67
Figure 4.39 HC-TW1000W/m <sup>2</sup> case at horizontal cutting plan, velocity vector flow pattern at 60s	68
Figure 4.40 (left) Velocity pattern at living room, at time 5s	68
Figure 4.41 (right) Velocity pattern at living room, at time 20s	68
Figure 4.42 (left) Velocity pattern at living room, at time 40s	69
Figure 4.43 (right) Velocity pattern at living room, at time 60s	69
Figure 4.44 (left) Velocity pattern at kitchen, at time 5s	69
Figure 4.45 (right) Velocity pattern at kitchen, at time 20s	69
Figure 4.46 (left) Velocity pattern at kitchen, at time 40s	70
Figure 4.47 (right) Velocity pattern at kitchen, at time 60s	70

## LIST OF FIGURES (Continued)

	<b>Page</b>
Figure 4.48 Mass flow rate gotten at outlets of each case at time steps (s)	71
Figure 4.49 Comparison of velocity on 3 cases of heat flux 1000W/m <sup>2</sup> was applied	72
Figure 4.50 Comparison of air movement in stair channel of group Top stair chamber simulation (left), and whole house simulation (right)	73
Figure 4.51 Trombe wall design for family room	74
Figure 4.52 Resizing Trombe wall design and maintain the existing outlet	75
Figure 4.53 Proposed design about the combination of Trombe wall and roof solar collector	76