

# CONTENTS

	Page
<b>ACKNOWLEDGEMENTS</b>	iii
<b>ABSTRACT (THAI)</b>	iv
<b>ABSTRACT (ENGLISH)</b>	v
<b>CONTENTS</b>	vi
<b>LIST OF TABLES</b>	ix
<b>LIST OF ILLUSTRATIONS</b>	x
<b>LIST OF ABBREVIATIONS AND SYBOLS</b>	xvi
<b>CHAPTER 1 INTRODUCTION</b>	1
1.1 Ions in natural water	1
1.1.1 Dissolved inorganic carbon (DIC)	2
1.1.2 Ammonium ion	3
1.2 Flow injection analysis (FIA)	5
1.3 Gas diffusion flow injection analysis (GD-FI)	7
1.4 Conductivity detector	11
1.5 Fluorescence detector	14
1.6 Research aims	16
<b>CHAPTER 2 EXPERIMENT</b>	17
2.1 Chemicals and reagent	17
2.2 Apparatus and components	18
2.3 Preparation of standard solution and reagents	18
2.4 Experimental setup	19

## CONTENTS (CONTINUED)

	Page
2.4.1 Fabrication of the direct current conductivity detector	19
2.4.2 Fabrication of the LED-Photodiode based fluorescence detector	22
2.4.3 FI system with the DC conductivity detector	24
2.4.4 The single-FI system with the FL detector for $\text{NH}_4^+$ determination	27
<b>CHAPTER 3 RESULTS AND DISCUSSION</b>	29
3.1 Direct current conductivity detector with GD-FI system for DIC determination	29
3.1.1 Characteristic of the fabricated DC Conductivity detector in FI system	29
3.1.2 DC-conductivity detector coupled with GD-FI system	36
3.1.3 Optimization of GD-FI system for DIC determination	39
3.1.4 The analytical performance for DIC determination	44
3.1.5 Application of DIC determination in the hot spring water sample	49
3.2 LED-photodiode based fluorescence detector with FI system for $\text{NH}_4^+$ determination	52
3.2.1 Some analytical characteristic in the FI system	53
3.2.2 The analytical performance for $\text{NH}_4^+$ determination	56
3.2.3 Application of $\text{NH}_4^+$ determination in air sample	57

## CONTENTS (CONTINUED)

	Page
<b>CHAPTER 4 CONCLUSION</b>	59
<b>REFERENCES</b>	61
<b>APPENDICES</b>	68
<b>APPENDIX A</b>	69
<b>APPENDIX B</b>	70
<b>APPENDIX C</b>	72
<b>APPENDIX D</b>	74
<b>CURRICULUM VITAE</b>	76



ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF TABLES

	Page	
Table 1.1	The brief review of detection methods using GD-FI system for DIC determination	9
Table 1.2	The brief review of detection methods using GD-FI system for $\text{NH}_4^+$ determination	11
Table 2.1	List of chemicals and reagent	17
Table 2.2	List of apparatus and components	18
Table 3.1	Comparison of the fabricated DC conductivity detectors performance	32
Table 3.2	The recovery of DIC determination in hot spring water samples with proposed conductivity detector	47
Table 3.3	Performance of the GD-FI system with the proposed DC conductivity detector for DIC determination comparing with other previous methods	48
Table 3.4	Comparison of DIC determination by using proposed detector and pulse conductivity detector	50
Table 3.5	The recovery of $\text{NH}_4^+$ determination in air sample with a simple fluorescence detector	56
Table 3.6	Concentration of $\text{NH}_3$ in air	57
Table B1	The concentration of DIC form the DC conductivity detector and commercial pulse conductometer (712 Metrohm) for evaluation of paired t-test	70
Table B2	The theoretical t value for levels of confidence interval	71

## LIST OF ILLUSTRATIONS

	Page
Figure 1.1 Bjerrum diagram shows a mole fraction of different DIC species vs the pH	3
Figure 1.2 The mole fraction of ammonia and ammonium as a function of pH	4
Figure 1.3 Typical flow technique: C, Carrier; R, Reagent; A, Air; S, Sample; D, Detector, W, Waste; MC, Mixing coil; P, Peristaltic pump; DB, Debubbler; SP, Syringe pump; HC, Holding coil; SV, Selection valve; SnV, Solenoid valve; MS, Multi-syringe pump; P1, P2, Solenoid micro pump [19]	6
Figure 1.4 Simple diagram of gas diffusion unit (GDU)	7
Figure 1.5 Conductance cell for measuring a conductivity in solution	13
Figure 1.6 The energy level for photoluminescent molecule; $S_0$ , Ground electronic singlet state; $S_1$ , $S_2$ , First and second excited electronic singlet state; $T_1$ , First excited electronic triplet state	14
Figure 1.7 Schematic diagram of the simple fluorometer	16
Figure 2.1 Schematic diagram (a) and photograph (b) of conductivity cell	20

## LIST OF ILLUSTRATIONS (CONTINUED)

	Page	
Figure 2.2	The DC conductivity circuits: a) circuitry diagram of using 78xx IC; b) a photographical circuit using 78xx IC; c) a circuitry diagram using WB-OA; CC, conductivity cell and d) a photographical circuit using WB-OA	21
Figure 2.3	Photograph of DC conductivity detector using 9V-battery to supply the WB-OA based DC conductivity detector	22
Figure 2.4	Schematic diagram of fluorescence cell	23
Figure 2.5	The circuit of integrated photodiode (OPT301 model) and operational amplifier	23
Figure 2.6	Photograph of the LED-photodiode based fluorescence detector	24
Figure 2.7	The dimensional diagram (a) and photograph (b) of gas diffusion unit (GDU)	26
Figure 2.8	The manifold of gas diffusion flow injection (GD-FI) system for DIC determination: MC, mixing coil; GDU, gas diffusion unit; CC, conductivity cell; DCC, direct current conductivity circuit; DAQ, data acquisition unit; COMP, computer	27
Figure 2.9	The FI-manifold for $\text{NH}_4^+$ determination; P, peristaltic pump; I, 6-ports-2-position injection valve; MC, mixing coil; FL, LED-photodiode based fluorescence detector; DAQ, data acquisition unit (Bluetooth)	28

## LIST OF ILLUSTRATIONS (CONTINUED)

	Page	
Figure 3.1	Potential divider circuit	30
Figure 3.2	Wheatstone bridge circuit	31
Figure 3.3	Comparison of FI-gram signal of 10-100 $\mu\text{mol L}^{-1}$ KCl injection in a single-FI of investigating DC-conductivity detector, blue line ( $\pm 5\text{V-WB-OA}$ ) and a commercial pulse conductivity detector (712 Metrohm) which the signal is shown in inverse signal, red line	33
Figure 3.4	The FI-gram of standard KCl injections for investigation the repeatability of DC- conductivity detector: a) The 40 injections of 60 $\mu\text{mol L}^{-1}$ KCl in 1.0 $\text{mL min}^{-1}$ of water stream solution with using the external power from $\pm 12\text{V}$ desktop power supply and b) The signal of DC-conductivity detector along 8 hours using two 9V-battery	34
Figure 3.5	The peak height signal of KCl and standard deviation of baseline signal with various stream flow rate of carrier in single line FI system	35
Figure 3.6	Typical GD-FI gram and calibration graph with DC conductivity detector. a) 1.0-10 $\text{mmol L}^{-1}$ $\text{HCO}_3^-$ b) 0.1-1.0 $\text{mmol L}^{-1}$ $\text{NH}_4^+$ c) 1-10 $\text{mmol L}^{-1}$ $\text{S}^{2-}$ ; comparison with pulse conductometer which the signal is shown in inverse signal, dash line (40 $\mu\text{L}$ injection volume with 20 cm length-mixing coil, 1.0 $\text{mL min}^{-1}$ flow rate of both carrier, DI water as acceptor solution stream and 0.1 $\text{mol L}^{-1}$ $\text{H}_3\text{PO}_4$ as a donor solution stream for $\text{HCO}_3^-$ , $\text{S}^{2-}$ detection and 0.1 $\text{mol L}^{-1}$ NaOH as a donor stream for $\text{NH}_4^+$ detection)	39

## LIST OF ILLUSTRATIONS (CONTINUED)

	Page
Figure 3.7	41
Optimization of an acceptor stream in GD-FI system using DC conductivity detector for DIC determination with using $1.0 \text{ mL min}^{-1}$ of $0.1 \text{ mmol L}^{-1} \text{ H}_3\text{PO}_4$ as a donor stream: a) Signal of $10 \text{ mmol L}^{-1} \text{ HCO}_3^-$ in $1.0 \text{ mL min}^{-1}$ of various solution types of acceptor stream, b) Signal of $5 \text{ mmol L}^{-1} \text{ HCO}_3^-$ in various flow rates of DI-water acceptor stream ( $0.1 \text{ mol L}^{-1} \text{ H}_3\text{PO}_4$ with flow rate of $1.0 \text{ mL min}^{-1}$ as a donor stream)	
Figure 3.8	43
Optimization of an acidic donor solution in GD-FI system using DC conductivity detector for DIC determination with using $1.0 \text{ mL min}^{-1}$ of DI water as an acceptor stream: a) Injection of $10 \text{ mmol L}^{-1} \text{ HCO}_3^-$ in various acid concentrations and typical acid solution and b) Injection of $5 \text{ mmol L}^{-1} \text{ HCO}_3^-$ in various flow rates of $0.1 \text{ mol L}^{-1} \text{ H}_3\text{PO}_4$ as a donor stream	
Figure 3.9	44
The GD-FI gram of 7 injections of $6 \text{ mmol L}^{-1} \text{ HCO}_3^-$ ( $40 \mu\text{L}$ injection volume with $20 \text{ cm}$ length-mixing coil, $1.0 \text{ mL min}^{-1}$ flow rate of both carrier, DI water as acceptor line and $0.1 \text{ mol L}^{-1} \text{ H}_3\text{PO}_4$ as donor line)	
Figure 3.10	46
The comparison of signal of major interference studies for DIC determination and adding $\text{KMnO}_4$ for removing sulfide and sulfite ion as interference	




## LIST OF ILLUSTRATIONS (CONTINUED)

	Page	
Figure 3.11	a) Schematic diagram of simple flow injection-gas diffusion unit with serial arrangement of pulse conductometer and DC-conductometer; V, 6-ports-2-positions injection valve; MC, mixing coil; GDU, gas diffusion unit; CC, conductivity cell; CPC, commercial pulse conductometer; DCC, direct current conductivity circuit; DAQ, data acquisition unit; COMP, computer and b) Photograph of two identical conductivity flow cells	51
Figure 3.12	The fluorescence spectrum of chemical product of NH <sub>3</sub> -OPA-sulfite reaction in 0.1 mol L <sup>-1</sup> phosphate buffer pH 11 and the overlaid spectra of UV-LED and UV filter	53
Figure 3.13	The FI-gram and linear calibration graph (inset) of 1-100 μmol L <sup>-1</sup> fluorescein injection in a single-FI system (using UV-LED as the light source and an integrated photodiode and amplifier (OPT301) as the light sensor)	54
Figure 3.14	The FI-gram and linear calibration graph (inset) of 0.5-10 μmol L <sup>-1</sup> NH <sub>4</sub> <sup>+</sup> in a single-FI system (67 μL injection volume with 200 cm length-mixing coil in 65°C water bath, 0.5 mL min <sup>-1</sup> flow rate of OPA reagent as a carrier)	55
Figure 3.15	Schematic diagram (a) and photograph (b) of air sampling system (0.1 mol L <sup>-1</sup> H <sub>2</sub> SO <sub>4</sub> as an absorbing solution, 300 mL min <sup>-1</sup> flow rate and 65-120 min sampling time)	58

## LIST OF ILLUSTRATIONS (CONTINUED)

	Page
Figure A1	
The acrylic block design and components for holding the integrated photodiode and built-in amplifier (OPT301)	69

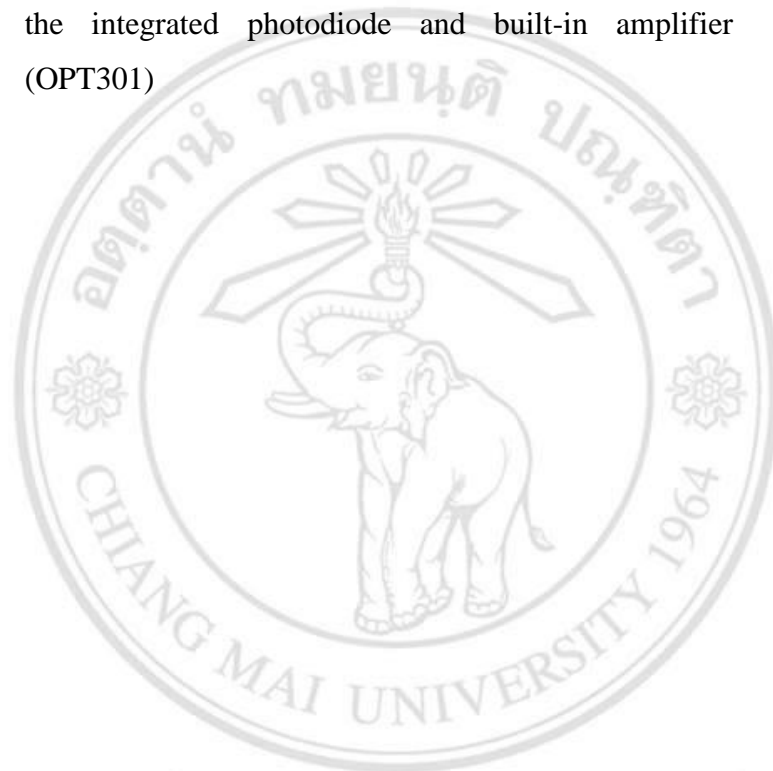

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved

## LIST OF ABBREVIATIONS AND SYSBOLS

M	Molar
L	Liter
mol	Mole
m	Meter
h	Hour
min	Minute
V	Volt
C	Celsius
ID	Inner diameter
OD	Outer diameter
DI	Deionized
DC	Direct current
LED	Light emitting diode
IC	Integrated circuit
ADC	Analog to digital converter
DAQ	Data acquisition

ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่  
Copyright© by Chiang Mai University  
All rights reserved